10K CAST STAINLESS STEEL,GLOBE VALVES


KITZ Fig: UCB



Sizes: 3/8-2inch(10-50mm)
SCREWED BONNET,INSIDE SCREW,FLANGED ENDS.
Standards
. End to End: KITZ STANDARD
. End Connection: JIS B2220 10K
. Wall Thickness: KITZ STANDARD
Test Standard
. KITZ STANDARD
Conform to
RoHS 10-50 mm (3/8-2 inch)
approved

Dimensions

SIZE(inch/mm)		L	L1	H	D1	Kg
3/8	10	73.0	0.0	106.0	70.0	0.00
1/2	15	85.0	0.0	106.0	70.0	0.00
3/4	20	95.0	0.0	108.0	70.0	0.00
1	25	108.0	0.0	119.0	80.0	0.00
11/4	32	120.0	0.0	142.0	90.0	0.00
11/2	40	135.0	0.0	155.0	90.0	0.00
2	50	155.0	0.0	186.0	115.0	0.00

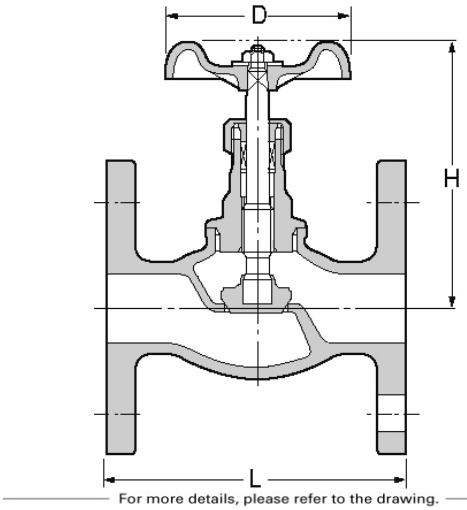

For more details, please refer to the drawing.

Material List

NAME OF PART	MATERIAL	SPECIFICATION
BODY	STAINLESS STEEL	A351 Gr.CF8/SCS13A
BONNET	STAINLESS STEEL	A351 Gr.CF8/SCS13A
STEM	STAINLESS STEEL	304SS(4)
DISC	STAINLESS STEEL	304SS

Specifications
10K CAST STAINLESS STEEL,GLOBE VALVES,SCREWED BONNET,INSIDE SCREW,FLANGED ENDS.
End to End : KITZ STANDARD,End Connection : JIS B2220 10K,Wall Tchickness : KITZ STANDARD,Test Standard : KITZ STANDARD,Sizes : 3/8-2inch(10-50mm),Conform to : RoHS 10-50 mm (3/8-2 inch),BODYMATERIAL :STAINLESS STEEL,BONNETMATERIAL :STAINLESS STEEL,STEMMATERIAL :STAINLESS STEEL,DISCMATERIAL :STAINLESS STEEL,KITZ Fig : UCB

Pressure-temperature ratings and other performance data published in this catalog have been developed from our design calculation, in-house testing, field reports provided by our customers and/or published official standards or specifications. They are good only to cover typical applications as a general guideline to users of KITZ products introduced in this catalog. For any specific application, users are kindly requested to contact KITZ Corporation for technical advice, or to carry out their own study and evaluation for proving suitability of these products to such an application. Failure to follow this request could result in property damage and/or personal injury, for which we shall not be liable. Read instruction manual carefully before use.

© KITZ Corporation. All Right Reserved.

●Bシリーズ

単位 MPa

流体の状態 / 呼び圧力 ＼ 温度	W	G_1	G_2
	120℃以下	150℃以下	180℃
5K	0.7	0.5	—
10K	1.4	1.1	1.0
20K	2.0	1.2	1.0

［備考］ W:圧力変動の少ない静流水のみ。
G_1～G_2:蒸気、空気、不燃性ガス、油［潤滑油・・作動油］など。

注）Bシリーズ PTFEシスク入グローブバルブを120℃以上で使用する場合は、当社までお問合せください。

Pressure-temperature ratings and other performance data published in this catalog have been developed from our design calculation, in-house testing, field reports provided by our customers and/or published official standards or specifications. They are good only to cover typical applications as a general guideline to users of KITZ products introduced in this catalog. For any specific application, users are kindly requested to contact KITZ Corporation for technical advice, or to carry out their own study and evaluation for proving suitability of these products to such an application. Failure to follow this request could result in property damage and/or personal injury, for which we shall not be liable. Read instruction manual carefully before use.

KITZ CORPORATION 1-10-1 Nakase, Mihama-ku, Chiba 261-8577, Japan
© KITZ Corporation. All Right Reserved.

ISO 9001 CERTIFIED
Since 1989